


The Americana[®]

FP410 / FP420 Series



SPECIFICATION SHEET

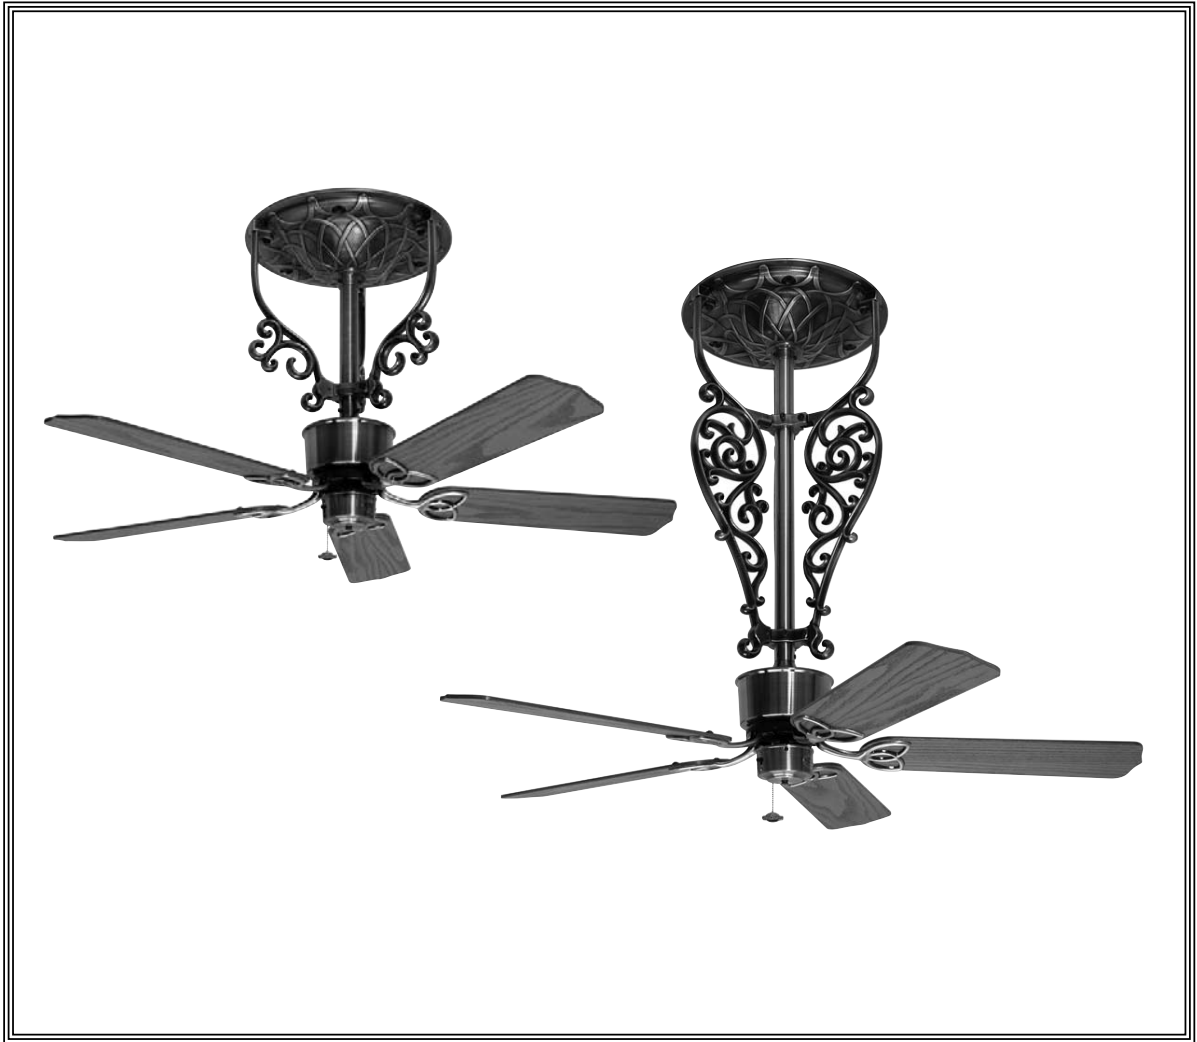

celebrating 25 years

Product Specifications subject to change

AMERICANA®

FP410 / FP420 Series Ceiling Fans



Short Fan Assembly - FP410**	
Overall Height (w/o Light Kit)	25"
Blade Sweep	*
Base Diameter	16¾"
Mounting Diameter (3-hole; centerline)	13"
Weight: (w/o Light Kit)	32 lbs

Long Fan Assembly - FP420**	
Overall Height (w/o Light Kit)	39"
Blade Sweep	*
Base Diameter	16¾"
Mounting Diameter (3-hole; centerline)	13"
Weight: (w/o Light Kit)	41 lbs

*Blade sweep varies depending on blade selection, see chart on next page

Available Finishes	
AB	Antique brass
BL	Black

Ordering Information	
Catalog No.	Description
FP410**	Short fan assembly
FP420**	Long fan assembly
FP1018	Reversible oak/walnut blade set (sold separately)

INSTALLATION REQUIREMENTS:

Requires 3/4" plywood wall backing, able to support at least 100 lbs. Fan base is secured to 3/4" plywood backing using three 5/16" lag bolts. Ceiling backing to be supplied by owner or contractor.

ELECTRICAL REQUIREMENTS:

Surface mounted electrical junction box centered in mounting location with a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

FK2100 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version available (antique brass only). Reversing switch and 3-speed pull-chain included.

BLADES:

A variety of 4- and 5-blade sets are available. 5-blade sets are available in palm, bamboo, wood and composite materials. 4-blade sets are made of wood and require the use of BH20 series blade holders (not included). 4-blade sets will increase speed and airflow. See our catalog or visit www.fanimation.com for blade options.

Note: Fan speeds will vary according to blade set—material, shape and size of blade. In general, smaller blades will turn faster than bigger ones and narrower blades will turn faster than wider ones.

CONTROL OPTIONS:

Optional C1 and C2 wall controls available—sold separately. Optional C20 remote control and C21 wall control available with use of optional SW50 switch cap receiver—all sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available—see our catalog or visit www.fanimation.com.

LOCATION USAGE:

Fan is rated for dry locations only.

BLADE SWEEP INFORMATION

Use the charts below to determine blade sweep.

5-Blade Fans		
Blade	Blade Length	Blade Sweep
<i>Palm Leaf (Dry Location Only)</i>		
ISP2, ISP5	18"	44"
ISP1, ISP4, ISP1RB, ISP4RB	22"	52"
<i>Woven Bamboo (Dry and Damp Locations Only)</i>		
ISD2A	18"	44"
ISD1A, ISD4A, ISD7A, ISD1C, ISD4C, ISD7C	22"	52"
<i>Wood (Dry Location Only)</i>		
B6030CY, B6030MH, B6030MP, B6030TK	30"	68"
B6000CY, B6000MH, B6000MP, B6000TK	36"	80"
<i>All-Weather Composite (Dry, Damp and Wet Location)</i>		
BPD5A	18"	44"
BPW20CY, BPW20MH, BPW20TK	20"	48"
BPW10CY	20.5"	49"
BPD1A, BPD4A, BPD4BL, BPD4MW, BPP1, BPP4, BPP1BR, BPD4BR, BPP4GR	22"	52"

4-Blade Fans		
Blade	Blade Length	Blade Sweep
<i>Wood (Dry Location Only)</i>		
B4010CP, B4020SS, B4040CP	22"	52"
B4000CA	26"	60"
B4060CP	36"	80"



celebrating 25 years

**10983 Bennett Parkway
Zionsville, IN 46077**

Toll Free (888) 567-2055

FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website @ www.fanimation.com

*Copyright 2010 Fanimation, Inc.
All Rights Reserved*



2010/01